

QuietCoat® 118

Noise reduction coating for appliances, cars and electronics

QuietCoat 118 is a sprayable, viscoelastic polymer that reduces noise and vibration with minimum weight, bulk and cost. QuietCoat 118 is engineered specifically for coating nonporous materials including stainless steel, galvanized iron, aluminum and composite (reinforced plastic) materials.


QuietCoat 118 Benefits

- Typical noise reduction of 6dB to 20dB
- Ideal for metal studs, HVAC ducts, metal roofing, machinery and appliances such as dryers, dishwashers, cars, computers, etc.
- Easily applied with brush, roller, air gun, or airless sprayer
- Fully ROHS compliant
- Meets the highest industry flammability standards
- Fast-drying in under 20 minutes
- Non-toxic, water-soluble, ultra low VOCs
- Noise-damping results will continue to improve for 14 days
- Environmentally friendly, lab tested

Product Specifications

Model:	QuietCoat 118
Density:	1,650 kg/m ³
Solid content:	>77 wt %
Weight:	Wet - 12.5 lbs/gallon Dry - 8.5 lbs/gallon
Viscosity:	4,000 centipoise
Compliance:	Low VOCs (<30 g/l)
Layer thickness:	0.02" - 0.06"
Drying time:	72 hours
Coverage:	40 - 80 sqft/gallon
Storage temp:	45° - 100° F Do not freeze

Available in 1 gallon, 5 gallon, 50 gallon and 250 gallon containers.

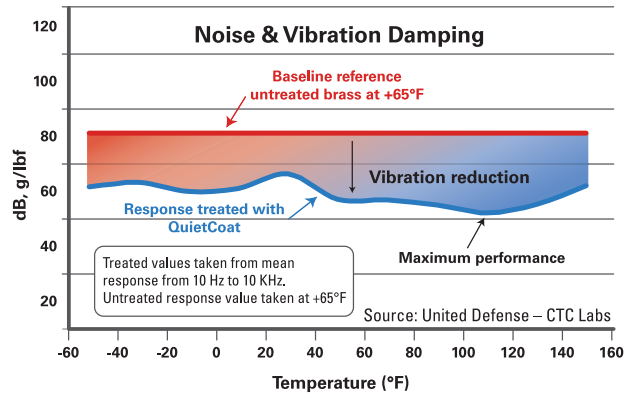

Typical noise reduction from 6dB to 20dB depending on application

Applications

- Metal
- Cars
- Electronics
- Appliances
- Stainless steel
- Galvanized iron
- Aluminum
- Composite materials

